

The latest generation of America's most popular all-terrain tire delivers the traction to go anywhere, anytime. Extremely durable TriGard[®] construction. Longer treadlife. Same great looks. Industry-first off-road assistance program.


Benefits:

- T/A** • Maximized "aired-down" traction and steering control in deep dirt, mud and sand; more aggressive appearance; reduced noise; minimized hydroplaning^{††}
- T/A** • Improved stress distribution (up to 12% increase in treadlife); enhanced resistance to irregular wear; better traction^{††}
- T/A** • Excellent traction and handling on- and off-road; improved traction; greater gravel wear resistance and decreased stone retention^{††}
- T/A** • Exceptional bruise resistance under the tread and in the sidewall
- T/A** • Stiffer tread area for precise steering response and better cornering control; excellent puncture and bruise resistance^{††}
- Helps protect wheel and tire from off-road hazards, especially during aired-down driving
- Long life and increased durability^{††}
- Improved ride and increased bead strength^{††}
- Choice of distinctive raised white letters on one sidewall and black outline serrated branding on the other

Features:

- ShoulderLock[™] technology (upper sidewall traction bars, 40% wider shoulder grooves)
- Dual-tread radius with advanced profile design
- Aggressive, high-void all-terrain tread design with interlocking tread elements, innovative siping and stabilized tread center
- Three-ply polyester carcass–TriGard[®] construction
- Two full-width steel belts
- Rim Protector
- Dual-compound tread
- High-strength single strand bead construction
- Raised white letter and black sidewall styling



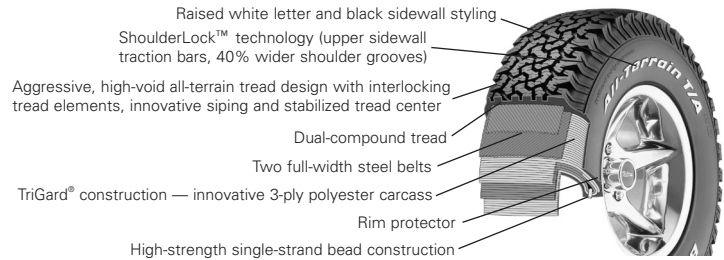

T/A Denotes a Traction/Advantage Benefit

Tire Size	Serv. Desc.	Sidewall	MSPN	Stock #	Rim Width Range (inches)	*Section Width on Measuring Rim Width**	*Overall Diameter	Tread Depth (in/32nds)	Revs/Mile at 45 mph	Max Load Single (lbs@psi)
27x8.50R14/C	95Q	RWL	90127	439-838	6.0 - 7.5	8.5 on 7.0	26.6	16.0	782.0	1515@50
LT215/75R15/C	100Q	RWL	71736	439-120	5.5 - 7.0	8.4 on 6.0	27.8	16.0	748.0	1765@50
LT235/75R15/C	104Q	RWL	73110	439-127	6.0 - 7.0	9.1 on 6.5	29.0	16.0	717.0	1985@50
LT325/60R15/C	106Q	RWL	41347	439-360Δ	9.0 - 11.0	12.9 on 9.5	30.5	16.0	682.0	2095@35
30x9.50R15/C	104Q	RWL	50534	439-890	6.5 - 8.5	9.4 on 7.5	29.5	16.0	705.0	1990@50
33x9.50R15/C	113Q	RWL	95155	439-938	6.5 - 8.5	9.5 on 7.5	32.7	16.0	636.0	2510@50
31x10.50R15/C	109Q	RWL	60316	439-895	7.0 - 9.0	10.5 on 8.5	30.7	16.5	677.0	2250@50
33x10.50R15/C	114Q	RWL	75595	439-905	7.0 - 9.0	10.6 on 8.5	32.7	16.0	636.0	2620@50
32x11.50R15/C	113Q	RWL	87811	439-924	8.0 - 10.0	11.4 on 9.0	31.7	17.0	656.0	2530@50
33x12.50R15/C	108Q	RWL	75406	439-943	8.5 - 11.0	12.4 on 10.0	32.7	17.0	636.0	2225@35
35x12.50R15/C	113Q	RWL	95210	439-972	8.5 - 11.0	12.7 on 10.0	34.7	17.0	599.0	2555@35
LT235/85R16/E	120Q	RWL	41577	439-166	6.0 - 7.0	9.3 on 6.5	31.8	16.0	654.0	3042@80
LT225/75R16/D	110Q	RWL	45961	439-122	6.0 - 7.0	8.8 on 6.0	29.4	16.0	707.0	2335@65
LT245/75R16/E	120Q	RWL	84488	439-139	6.5 - 7.5	9.7 on 7.0	30.6	16.0	680.0	3042@80
LT265/75R16/D	120Q	RWL	43366	439-167	7.0 - 8.0	10.5 on 7.5	31.8	16.0	654.0	3042@65
LT285/75R16/D	122Q	RWL	56567	439-185	7.5 - 9.0	11.3 on 8.0	32.9	17.0	632.0	3305@65
LT295/75R16/D	123Q	RWL	96547	439-454Δ	7.5 - 9.5	11.6 on 8.0	33.5	17.0	621.0	3415@65
LT315/75R16/D	121Q	RWL	95328	439-322	8.0 - 10.0	12.1 on 8.5	34.7	17.0	599.0	3195@50
LT215/70R16/C	100R	RWL	40954	475-427	5.5 - 7.0	8.7 on 6.5	28.0	16.0	743.0	1765@50
LT225/70R16/C	102R	RWL	70688	475-429	6.0 - 7.0	8.9 on 6.5	28.5	16.0	730.0	1875@50
LT235/70R16/C	104Q	RWL	92965	439-138	6.0 - 7.5	9.5 on 7.0	29.1	16.0	715.0	1985@50
LT245/70R16/D	113Q	RWL	56856	439-444	6.5 - 7.5	9.7 on 7.0	29.6	16.0	703.0	2535@65
LT255/70R16/D	115Q	RWL	53876	439-265	6.5 - 8.0	10.2 on 7.5	30.2	16.0	689.0	2680@65
LT265/70R16/D	117Q	RWL	41561	439-546	7.0 - 8.5	10.7 on 8.0	30.7	16.0	678.0	2835@65
LT275/70R16/D	119Q	RWL	56638	439-545	7.0 - 8.5	11.0 on 8.0	31.3	16.0	665.0	3000@65
LT305/70R16/D	118Q	RWL	90735	439-692	8.0 - 9.5	12.2 on 9.0	33.0	17.0	630.0	2910@50
31x10.50R16.5/D	116Q	RWL	77809	439-898	8.25 - only	10.5 on 8.3	30.7	16.5	678.0	2745@65
33x12.50R16.5/D	118Q	RWL	54758	439-947	8.25 - 10.5	12.3 on 9.8	32.7	17.0	634.0	2930@50
35x12.50R16.5/D	123Q	RWL	55633	439-974	8.25 - 10.5	12.5 on 9.8	34.7	17.0	600.0	3385@50
LT265/70R17/C	112Q	RWL	46621	439-446	7.0 - 8.5	10.7 on 8.0	31.8	16.0	654.0	2470@50
LT285/70R17/D	121Q	RWL	57974	439-604	7.5 - 9.0	11.5 on 8.5	32.8	16.0	634.0	3195@65
LT315/70R17/D	121/118R	BSW	54142	400-984Ω	8.5 - 10.0	12.0 on 8.5	34.5	17.0	601.0	3195@50
37x12.50R17/D	124Q	RWL	99249	439-481	8.5 - 11.0	12.8 on 10.0	36.3	17.0	574.0	3525@50
LT285/65R18/D	121Q	RWL	95290	439-907	8.0 - 10.0	11.5 on 8.5	32.8	16.0	634.0	3195@65

ΩSize does not meet the RMA requirements for severe snow conditions.

ΔSize has shorter traction bars on the shoulder, and does not extend down the sidewall.

*The dimensions shown are average values for tires measured on the measuring rim width. Individual tires may vary from data shown.

**Section width varies approximately 0.2" (5mm) for every 0.5" change in rim width.

DANGER: Never mount a 16" diameter tire on a 16.5" rim.

WARNING: Serious or fatal injury may result from: Tire failure due to underinflation/overloading — follow owner's manual or Tire Information Placard in vehicle. Explosion of tire/rim assembly due to improper mounting. Never inflate beyond 40 psi to seat beads. Only specially trained persons should mount tires. Mixing bias tires with radials on the same vehicle. Mixing different tire sizes. Follow manufacturer's recommendations.

††Compared to Radial All-Terrain T/A[®].

Estimated data subject to change for all sizes.

The All Terrain T/A[®] KO tire meets all requirements set by the Rubber Manufacturers Association for use in severe snow conditions.



Adventure Assurance Program for All-Terrain T/A[®] KO tires. If you get stuck, we'll send a truck: the first roadside assistance coupled with a manufacturer's off-road assistance program. It's your assurance that help is at hand 24 hours a day, 365 days a year for a period of 24 months from the date of purchase.

