

The only professional-grade ultra-high performance truck tire offered to the public. Traction that dominates Baja desert racing. Extremely aggressive tread pattern. TriGard® Plus construction for unparalleled durability.


Benefits:

- T/A** • Excellent off-road soft surface traction; more tread element edges, great side bite and lateral traction in off-road situations
- T/A** • Superb tread area puncture/bruise resistance; confident high-speed performance and handling
- T/A** • Strong lower sidewall; precise steering response and predictable cornering
- Exceptional strength, bruise resistance and structural integrity; great strength and puncture resistance in the sidewall
- Excellent cutting and chunking resistance; high durability
- Distinctive appearance with black-outline serrated letters and unique Baja T/A insignia

Features:

- Aggressive, self-cleaning tread design with special tread element edge scoops and shoulder scallops
- Two strong steel belts with two full-width nylon cap plies
- Durable bead construction
- TriGard® Plus Construction—three full nylon carcass plies plus an additional nylon sidewall ply†
- Dual-compound tread
- Black sidewall styling



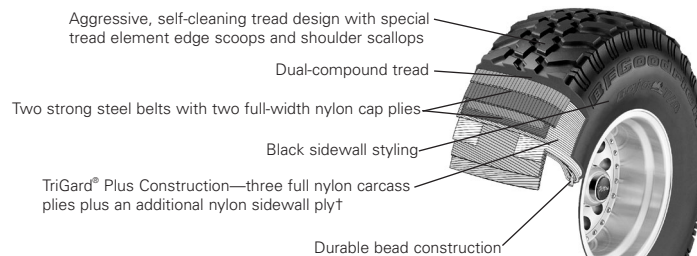

T/A Denotes a Traction/Advantage Benefit

Tire Size	Sidewall	MSPN	Stock #	Rim Width Range (inches)	*Section Width on Measuring Rim Width**	*Overall Diameter	Tread Depth (in/32nds)	Revs/Mile at 45 mph	Max Load Single (lbs@psi)
31x10.50R15/C	BSW	34176	438-895	7.0 - 9.0	10.8 on 8.5	30.8	18.0	675.0	2250@50
33x10.50R15/C	BSW	26444	438-905	7.0 - 9.0	11.2 on 8.5	32.8	18.0	634.0	2620@50
33x12.50R15/C	BSW	13272	438-943	8.5 - 11.0	12.5 on 10.0	32.8	18.0	634.0	2225@35
35x12.50R15/C	BSW	02516	438-972	8.5 - 11.0	12.8 on 10.0	34.8	18.0	597.0	2555@35
LT315/75R16/C	BSW	45852	438-270 [^]	8.0 - 10.0	12.8 on 8.5	34.6	14.0	601.0	2535@35
35x12.50R17/C	BSW	49244	438-282 [^]	8.5 - 11.0	13.2 on 10.0	34.6	14.0	601.0	2400@35
37x12.50R17/D	BSW	50056	438-481 ^{^†}	8.5 - 11.0	13.4 on 10.0	36.7	14.0	567.0	3480@50
37x12.50R17/D	BSW	89885	470-481 ^{^†Δ}	8.5 - 11.0	13.4 on 10.0	36.7	14.0	567.0	3480@50

[^]These sizes utilize the solid center rib tread design proven in desert racing.

^Δ MSPN#89885 is a sidewall aesthetic change to MSPN# 50056.

[†] This size uses 4 full nylon carcass plies.

*The dimensions shown are average values for tires measured on the measuring rim width. Individual tires may vary from data shown.

**Section width varies approximately 0.2" (5mm) for every 0.5" change in rim width.

NOTE: Use only on rims designated by the rim manufacturer as suitable for radial tires.

DANGER: Never mount a 16" diameter tire on a 16.5" rim.

WARNING: Serious or fatal injury may result from: *Tire failure due to underinflation/overloading – follow owner's manual or Tire Information Placard in vehicle. *Explosion of tire/rim assembly due to improper mounting. Never inflate beyond 40 psi to seat beads. Only specially trained persons should mount tires.

Estimated data subject to change for all sizes.