

*The world's best rock-crawling tire. Ideal for extreme terrain conditions. Winner of multiple rock-crawling championships. Choice of multiple rock-crawling champions. Available in two sizes: Molded (37X12.50R17 and 35X13.50R15) or grooveable (37X12.50R17).*


## **Benefits:**

- T/A** • Large, deep lugs – even deeper than Mud-Terrain T/A<sup>™</sup>KM provide exceptional traction in rock, mud and dirt. Tread can be carved to tune performance to meet the specific needs of the consumer
- T/A** • One of the highest puncture resistant sidewalls of any tire we've ever offered
- T/A** • A super-tough carcass built like some of our off-road racing tires. The lessons we learn in off-road racing are built right into the Krawler T/A<sup>™</sup>KX
- T/A** • Deep, large and solid sidewall lugs aid both traction and puncture resistance; even these can be tuned by the consumer
- T/A** • Softer tread compound evolved from our years of off-roading experience. Conforms better to uneven surfaces, increases traction
- T/A** • Improved wheel and tire protection from off-road hazards, especially during aired-down situations

## **Features:**

- Ultra-aggressive deep-lug tread pattern
- Four nylon sidewall plies
- Race-spec carcass
- Brawny, solid sidewall lugs
- X-tra traction tread compound
- Rim protector



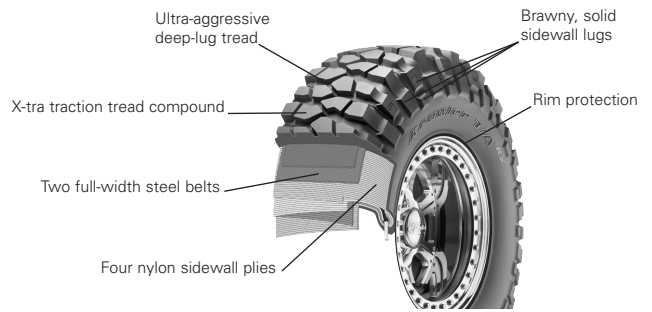

**T/A** Denotes a Traction/Advantage Benefit

Tire Size	Serv. Desc.	Sidewall	MSPN	Stock #	Rim Width Range (inches)	*Section Width on Measuring Rim Width**	*Overall Diameter	Tread Depth (in/32nds)	Revs/Mile at 45 mph	Max Load Single (lbs@psi)
35x13.50R15/C	114L	BSW	44690	746-688	8.5 - 11.0	13.8 on 10.0	35.0	22.0	594.0	2600@35
37x12.50R17/C	116L	BSW	51716	746-169	8.5 - 11.0	12.9 on 10.0	37.0	22.0	562.0	2755@35
37x12.50R17/C	116L	BSW	73977	752-169 <sup>†</sup>	8.5 - 11.0	12.9 on 10.0	37.0	22.0	562.0	2755@35

\*The dimensions shown are average values for tires measured on the measuring rim width. Individual tires may vary from data shown.

\*\*Section width varies approximately 0.2" (5mm) for every 0.5" change in rim width.

<sup>†</sup>MSPN# 73977 features a partially blank tread, and is intended for custom-grooving and tuning by the user.

All Krawler T/A<sup>®</sup>KX tires are L-speed rated. Do not use at speeds in excess of 75mph.

All Krawler T/A<sup>®</sup>KX tires are C-load rated. Do not use in applications that exceed the maximum load capacity of the tire.

NOTE: Use only on rims designated by the rim manufacturer as suitable for radial tires.

DANGER: Never mount a 17" diameter tire on a 17.5" rim.

WARNING: Serious or fatal injury may result from: Tire failure due to underinflation/overloading – follow owner's manual or Tire Information Placard in vehicle. Explosion of tire/rim assembly due to improper mounting. Never inflate beyond 40 psi to seat beads. Only specially trained persons should mount tires.

See the vehicle owner's manual or MAST Fitment Guide for information on the proper size and type of replacement tires.

Estimated data subject to change for all sizes.